


Ceiling Speakers



- Versatile
- Easy installation
- Excellent for public address applications

spec \ model	Unit	CS-03	CS-10	CS-44	CS-45
Rated Output	W	3	10	3	3
Impedance	Ω	COM 3.3kohm 5kohm 10kohm	COM 1kohm 2kohm -	COM 3.3kohm 5kohm 10kohm	
Frequency Response	Hz	180 ~ 10k	120 ~ 10k	180 ~ 10k	110 ~ 10k
S.P.L 1m/1W	dB	98	92	98	98
Enclosure Material		Aluminum	ABS resin	Painted steel	ABS resin
Weight	kg	0.65	1	1.3	1
Dimensions	mm	228(Ø)x96(D)	303(W) x 303(H) x 95(D)		

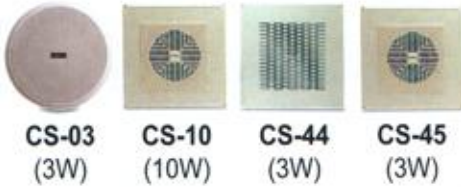

- Cost-effective ceiling speaker
- Tapped for 3W, 2W, 1W@100V lines
- Easy to install without screws or special tools
- GP-03 round, off-white ABS grille for MS-03

spec \ model	Unit	MS-03	MS-05	GP-03
Rated Output	W	3	5	-
Impedance	Ω	3.3k, 5k, 10k		
Frequency Response	Hz	250 ~ 12k		
S.P.L 1m/1W	dB	98		
Weight	g	63		124
Dimensions	mm	246(W) x 174(H) x 110(D)		230(Ø) x 12(H)



- Versatile
- Easy installation
- Excellent for public address applications

spec \ model	Unit	CS-03A	CS-05
Rated Output	W	3	5
Impedance	Ω	COM, 3.3k 5k, 10k	COM, 2k 4k, 8k
Frequency Response	Hz	150 ~ 15k	150 ~ 14k
S.P.L 1m/1W	dB	90	92
Weight	g	725	945
Dimensions	mm	227(Ø) x 100(D)	